


SPECIFICATIONS

(Typical values for batteries stored at 20 °C for one year)

Nominal Capacity (At 1mA/20 °C/68 °F/2.0V Cut-Off)	1.2 Ah
Open Circuit Voltage (At 20 °C/68 °F)	3.67 V
Nominal Voltage (At 1mA/20 °C/68 °F)	3.6 V
Maximum Continuous Current	50 mA
Maximum Pulse Current Capability	100 mA
Rated 1 Sec. Pulse Capability (To 3V)	20 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	9.2 g (0.324 oz)
Anode Surface Area	6 cm ²
Volume	4.3 cm ³
Diameter (Max)	14.5 mm
Height (Max)	25.2 mm


DIMENSIONS IN MM

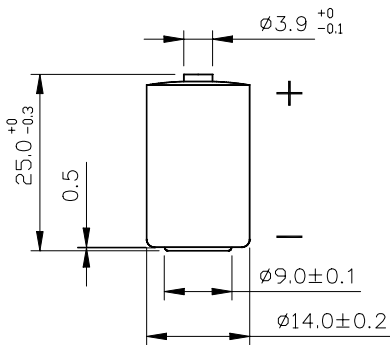

WARNING


Fire, Explosion And Severe Burn Hazard.
Do Not Recharge, Crush, Disassemble,
Heat Above 212°F(100°C), Incinerate
Or Expose Contents To Water

Voltage (V) DISCHARGE CHARACTERISTICS AT +20°C

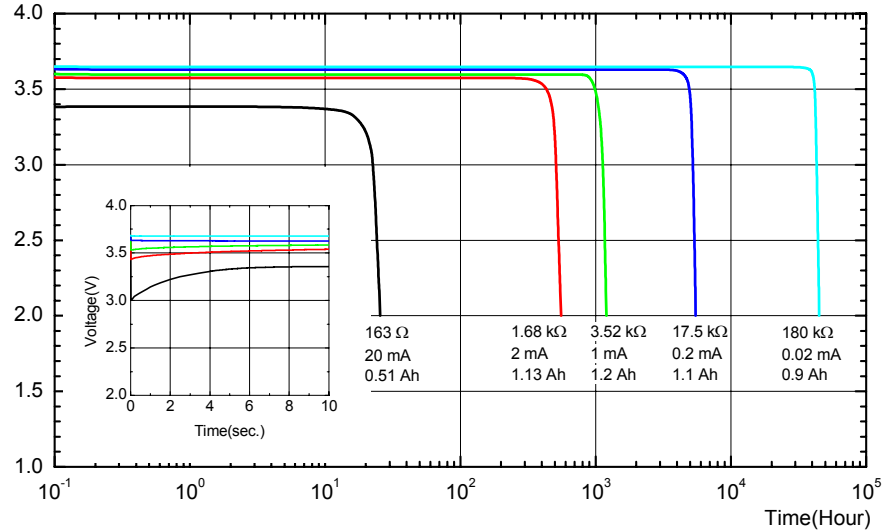

Capacity (Ah)

CAPACITY vs. CURRENT

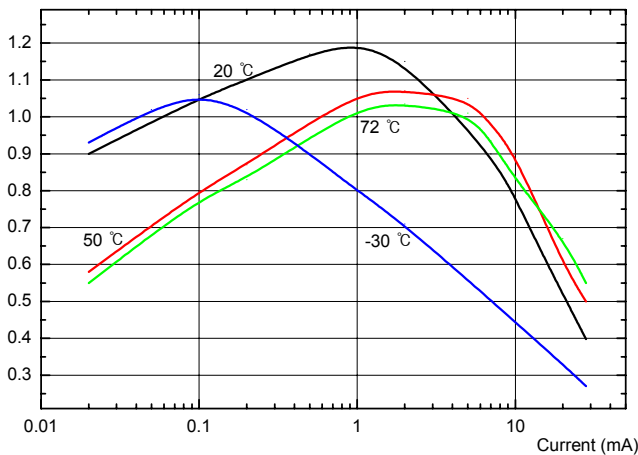

Voltage (V)

OPERATING VOLTAGE

