
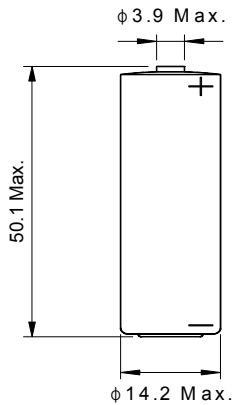


SPECIFICATIONS

(Typical values stored at 20°C for one year)


Nominal Capacity (at 2mA/20°C/68°F/2.0V Cut-Off)	2.4Ah
Nominal Voltage	3.6V
Maximum Continuous Current	100mA
Maximum Pulse Current	200mA
Rated 1sec. Pulse Capability to 3V	40mA
Operating Temperature Range	-55 ~ 85°C
Weight	17.1g
Volume	8.0cm ³

DISCHARGE CHARACTERISTICS AT +20°C

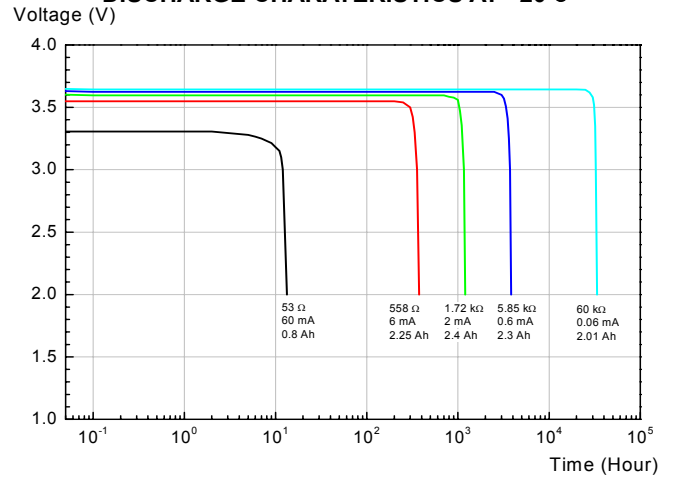


DIMENSIONS IN MM


CAPACITY VS CURRENT

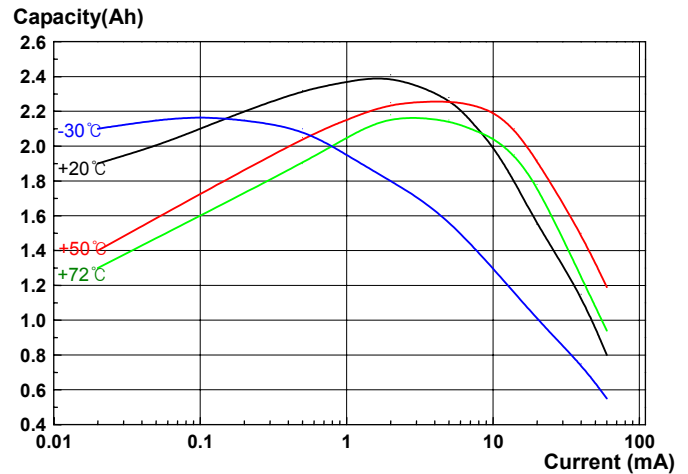

VOLTAGE RECOVERY AFTER LONG STORAGE

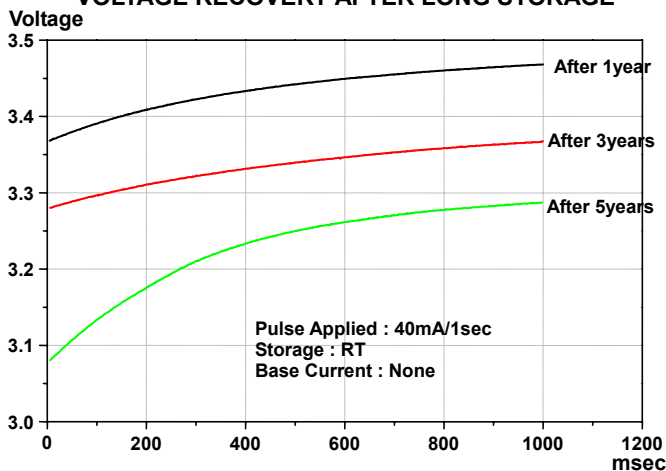

OPERATING VOLTAGE

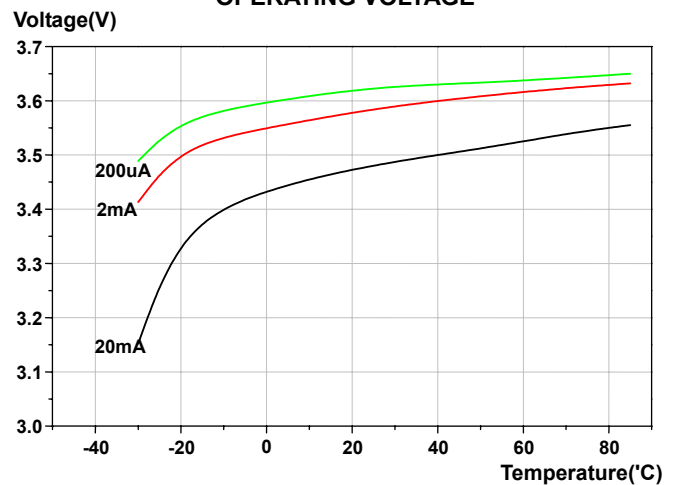

Available Terminal Type: STD, T1, T2, T3, T3/R, T3EU, T3EU/R, Wire, Connector Type